



Eco Glasswashers

Eco 1

Eco 2

Eco 3



How they perform

Why Classeq has the edge

What it means for YOU!

Simple, clear controls	Easy staff training	Fewer mistakes means cleaner glasses
Double skinned door	Quieter and cooler to the touch	A quieter bar area
Integral chemical dosing pumps	Safe, accurate and effective use of detergents	Reduced risks to staff and lower costs
Unique removable door and rack guides	Better access for cleaning and maintenance	Cleaner machine means cleaner glasses and lower service bills
Moulded steel interior wash chamber	Improved standards of machine hygiene	Easier cleaning and maintenance and more consistent results
Extremely low capacity wash tank	As little as 10 litre capacity	Quicker start up and lower bills
Auto cycle facility	Machine begins washing automatically when temperatures are reached	Lets you get on with other tasks
Full coverage filter system	Keeps wash water cleaner for longer	Less water changes, sparkling glasses, lower fuel bills

Eco 1



Specifications

Width	410 mm
Depth	512 mm
Depth – door open	809 mm
Height	640-660 mm
Rack size (square)	350 mm
Maximum pints per rack	12
Door opening height	330 mm
Maximum clear entry height	320 mm
Operating level	<70 db
Net weight	35 kg
Gross weight	40 kg
Rinse booster pump	Optional
Built in detergent dispenser	Yes
Built in rinse aid dispenser	Yes
Double skinned door	Yes
Maximum racks per hour water @50°C	30
Cycle times	2 min
Water connection - BSP	3/4"
Water inlet height from floor level	40 mm
Required water pressure (flow)	2 bar
Required water flow	11 Ltrs/min
Drain type	Gravity (optional drain pump)
Drain size	35 mm
Operating voltage	
- 220/50/1	Std
- 400/50/3	No
Amps required - 1 phase	
- Water fed @ 40° C	13 Amps
- Water fed @ 10° C	13 Amps
Total Connected Load	
- Water fed @ 10° C	2.92 kW
- Water fed @ 40° C	2.92 kW
Temperature interlock	Yes (can be removed)
Quick start mode	Yes
Wash tank heating	2.0 kW
Rinse boiler heating	
- Water fed @ 10° C	2.6 kW
- Water fed @ 40° C	2.6 kW
Wash pump size	0.22 kW
Wash pump capacity	220 Ltrs/min
Wash tank capacity	10 Ltrs
Wash tank operating temperature	55°C
Rinse boiler capacity	6.5 Ltrs
Rinse boiler operating temperature	70°C
Rinse water consumption - @ 2 Bar	3.25 Ltrs
Max/Min stand pipe height from floor	0-600mm
Max/Min water pressure	6 bar/1 bar
Minimum water flow	8 Ltrs/min


Eco 2



Specifications

Width	450 mm
Depth	535 mm
Depth – door open	860 mm
Height	740-760 mm
Rack size (square)	400 mm
Maximum pints per rack	16
Door opening height	330 mm
Maximum clear entry height	320 mm
Operating level	<70 db
Net weight	35 kg
Gross weight	40 kg
Rinse booster pump	Optional
Built in detergent dispenser	Yes
Built in rinse aid dispenser	Yes
Double skinned door	Yes
Maximum racks per hour water @50°C	30
Cycle times	2 min
Water connection - BSP	3/4"
Water inlet height from floor level	40 mm
Required water pressure (flow)	2 bar
Required water flow	11 Ltrs/min
Drain type	Gravity (optional drain pump)
Drain size	35 mm
Operating voltage	
- 220/50/1	Std
- 400/50/3	No
Amps required - 1 phase	
- Water fed @ 40° C	13 Amps
- Water fed @ 10° C	13 Amps
Total Connected Load	
- Water fed @ 10° C	2.92 kW
- Water fed @ 40° C	2.92 kW
Temperature interlock	Yes (can be removed)
Quick start mode	Yes
Wash tank heating	2.0 kW
Rinse boiler heating	
- Water fed @ 10° C	2.6 kW
- Water fed @ 40° C	2.6 kW
Wash pump size	0.22 kW
Wash pump capacity	220 Ltrs/min
Wash tank capacity	10 Ltrs
Wash tank operating temperature	55°C
Rinse boiler capacity	6.5 Ltrs
Rinse boiler operating temperature	70°C
Rinse water consumption - @ 2 Bar	3.25 Ltrs
Max/Min stand pipe height from floor	0-600mm
Max/Min water pressure	6 bar/1 bar
Minimum water flow	8 Ltrs/min

Eco 3

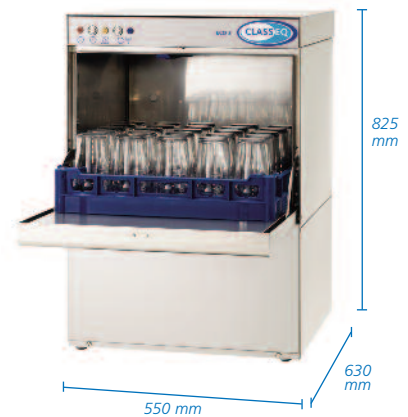

Specifications

Width	550 mm
Depth	625 mm
Depth – door open	985 mm
Height	825-845 mm
Rack size (Square)	500 mm
Maximum pints per rack	25
Door opening height	360 mm
Maximum clear entry height	345 mm
Operating level	<70 db
Net Weight	60 kg
Gross Weight	65 kg
Rinse booster pump	Optional
Built in detergent dispenser	Yes
Built in rinse aid dispenser	Yes
Double skinned door	Yes
Maximum racks per hour water @50°C	30
Cycle times	2 min
Water connection - BSP	3/4"
Water inlet height from floor level	40 mm
Required water pressure (flow)	2 bar
Required water flow	11 Ltrs/min
Drain type	Gravity (optional drain pump)
Drain size	35 mm
Operating voltage	
- 220/50/1	Std
- 400/50/3	Optional
Amps required - 1 phase	
- Water fed @ 40° C	30 Amps
- Water fed @ 10° C	30 Amps
Amps required - 3 phase	
- Water fed @ 40° C	13 Amps
- Water fed @ 10° C	13 Amps
Total Connected Load	
- Water fed @ 10° C	6.84 kW
- Water fed @ 40° C	6.84 kW
Temperature interlock	Yes (can be removed)
Quick start mode	Yes
Wash tank heating	2.0 kW
Rinse boiler heating	
- Water fed @ 10° C	6.0 kW
- Water fed @ 40° C	6.0 kW
Wash pump size	0.74 kW
Wash pump capacity	380 Ltrs/min
Wash tank capacity	18 Ltrs
Wash tank operating temperature	55°C
Rinse boiler capacity	7.5 Ltrs
Rinse boiler operating temperature	70°C
Rinse water consumption - @ 2 Bar	3.25 Ltrs
Max/Min stand pipe height from floor	0-600mm
Max/Min water pressure	6 bar/1 bar
Minimum water flow	8 Ltrs/min

